

AEZXTEU

LED EXIT SIGN

STANDARD



ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.

ELECTRICAL

- Dual 120V/277V.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V1000mAH Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out chevron directional indicators.
- Compact, low-profile design.


OPTIONS

- STD: Self-diagnostic feature performs monthly, biannual and annual tests to ensure reliable operation and meet electrical and life safety codes.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Batteries 3 years.
- Meets UL924, NFPA101 Life Safety Code and NEC
- UL listed for damp locations (0°- 40°C).

DIMENSIONS (MM)

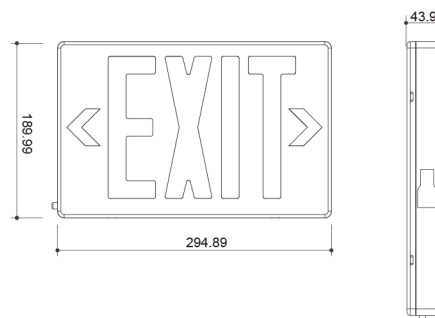

ORDERING INFORMATION

Model	No. of Faces	LED Color	Housing Color	Battery	Options
AEZXTEU	1 Single face	R Red	W White	Blank AC Only	S Salida
	2 Universal Single / Double face	G Green	B Black	EM Battery backup	SDT Self diagnostic

PACKING INFORMATION

Pieces per master	Box Dimensions (cm)	CBM (Master)	Gross weight (Kg)
6	39x32.5x22.5	0.0285	8.2

Damp location is only for low or high temperature operation not for dust-proof or water-proof

Specifications and dimensions subject to change without notice.