



INDUSTRIAL  
COMMERCIAL  
RESIDENTIAL


## A-21 STRAIGHT BLADE RECEPTACLES

### TESTING & CODE COMPLIANCE

- UL Listed:  
1263, 1231, 1233:  
(file no. E15058).  
CSA file 6914  
(6233-01).
- 83 & 41:  
UL (file no. E15012),  
CSA file 2081  
(6221-02).
- 5716N to 498,  
meets UL Federal  
Spec. WC-596  
(file no. E2369).
- CSA Certified to  
C22.2 no. 42.
- NOM Certified,  
except as noted.

### MATERIAL CHARACTERISTICS

Temperature Rating:  
-20°C (without  
impact) to 75°C  
max. continuous.  
5716N: V2 rated;  
-40°C (without  
impact) to 105°C  
max. continuous.



1263




1264



1231



41



5716N

## Commercial Specification Grade Straight Blade Power Devices

2 Pole, 3 Wire Grounding  
NEMA TT-30, 5-30  
30A 125V

### Power Devices

#### FEATURES

- Heavy gauge steel mounting strap zinc-plated for corrosion resistance.
- Receptacles for use with copper or aluminum wire.
- Surface receptacles have patented lay-in terminals and accept up to #4 wire.
- Universal plugs include blades for 30A configurations.
- Surface receptacles 0.75" (19.05mm) and 1.0" (25.4mm) concentric knockouts and adjustable cord clamp allow for wiring from bottom or back.
- Flush receptacles fit one or two gang enclosures.
- High strength glass reinforced nylon body resists breakage in high abuse areas for Catalog No. 5716N.

#### NEMA TT-30 Rating 30A 125V

##### Receptacles

| Description                         | Color | Catalog No. |
|-------------------------------------|-------|-------------|
| Flush                               | Brown | 1263*       |
| Panel Mount (by special order only) | Brown | U1263*      |

\*Not NOM

##### Plugs

| Description          | Color | Catalog No. |
|----------------------|-------|-------------|
| Angle Travel Trailer | Black | 83          |

##### Adapter

| Description                                                                    | Color | Catalog No. |
|--------------------------------------------------------------------------------|-------|-------------|
| Travel Trailer Plug to Female Receptacle - 15A or 20A 125V NEMA 5-15R or 5-20R | Black | 1264†       |

†1264 is not CSA approved

#### NEMA 5-30 Rating 30A 125V

##### Receptacles

| Description | Color | Catalog No. |
|-------------|-------|-------------|
| Surface     | Black | 1231†       |
| Flush       | Black | 5716N       |
| Flush       | Brown | 1233        |

##### Plugs

| Description             | Color | Catalog No. |
|-------------------------|-------|-------------|
| Angle Universal - Vinyl | Black | 41          |

†Not UL Listed



TT-30R



TT-30P



5-30R



5-30P

# Commercial Specification Grade Straight Blade Power Devices

2 Pole, 3 Wire Grounding  
NEMA 5-50, 6-30  
50A 125V, 30A 250V



INDUSTRIAL  
COMMERCIAL  
RESIDENTIAL

## A-22 STRAIGHT BLADE RECEPTACLES

### TESTING & CODE COMPLIANCE

- Listed to UL 498 & meets Federal Spec. WC-596 (file no. E2369) except as noted.
- Receptacles: (file no. E15058);
- Plugs: (file no. E15012).
- CSA Certified to C22.2 no. 42 (file no. LR7087);
- Plugs: (file no. 2081 (6221-02)),
- Receptacle: (file no. 6914 (6233-01)).
- NOM Certified

### MATERIAL CHARACTERISTICS

Temperature Rating:  
-20°C (without impact) to 75°C max. continuous.  
5700N, V2 rated;  
-40°C (without impact) to 105°C max. continuous.

## Power Devices

### FEATURES

- Heavy gauge steel mounting strap zinc-plated for corrosion resistance.
- Receptacles for use with copper or aluminum wire.
- Surface receptacles have patented lay-in terminals and accept up to #4 wire.
- Universal plugs include blades for 50A configurations.
- Surface receptacles 0.75" (19.05mm) and 1.0" (25.4mm) concentric knockouts and adjustable cord clamp allow for wiring from bottom or back.
- Flush receptacles fit one or two gang enclosures.
- High strength glass reinforced nylon body resists breakage in high abuse areas for Catalog No. 5700N.


### NEMA 5-50 Rating 50A 125V

#### Receptacles

| Description | Color | Catalog No. |
|-------------|-------|-------------|
| Surface     | Black | 1251        |
| Flush       | Brown | 1253        |

#### Plugs

| Description             | Color | Catalog No. |
|-------------------------|-------|-------------|
| Angle Universal - Vinyl | Black | 41          |

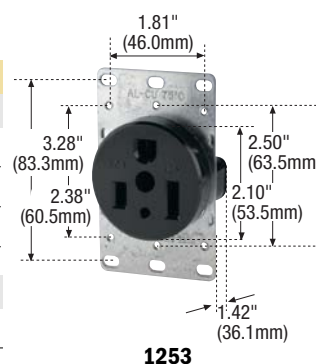

1253

### NEMA 6-30 Rating 30A 250V

#### Receptacles

| Description                              | Color | Catalog No. |
|------------------------------------------|-------|-------------|
| Surface                                  | Black | 1232        |
| Flush                                    | Black | 5700N       |
| Flush                                    | Brown | 1234        |
| Flush with 1 Gang Brass Finish Wallplate | Brown | 4234*       |

\*Not NOM

#### Plugs

| Description             | Color | Catalog No. |
|-------------------------|-------|-------------|
| Angle Universal - Vinyl | Black | 42          |



41



5-50R



5-50P



6-30R



6-30P



INDUSTRIAL  
COMMERCIAL  
RESIDENTIAL

## A-23 STRAIGHT BLADE RECEPTACLES

### TESTING & CODE COMPLIANCE

• Listed to UL 498 & meets Federal Spec. WC-596 (file no. E2369) except as noted.

Receptacles:

(file no. E15058);

Plugs:

(file no. E15012).

• CSA Certified to

C22.2 no. 42

(file no. LR7087);

Plugs:

(file no. 2081

(6221-02),

Receptacle:

(file no. 6914

(6233-01).

• NOM Certified.

### MATERIAL CHARACTERISTICS

Temperature Rating:

-20°C (without

impact) to 75°C

max. continuous.

5795N and 5709N:

V2 rated; -40°C

(without impact)

to 105°C max.

continuous.




## Commercial Specification Grade Straight Blade Power Devices

2 Pole, 3 Wire Grounding  
NEMA 6-50, 7-30,  
50A 250V, 30A 277V.


### Power Devices

#### FEATURES


- Heavy gauge steel mounting strap zinc-plated for corrosion resistance.
- Receptacles for use with copper or aluminum wire.
- Surface receptacles have patented lay-in terminals and accept up to #4 wire.
- Universal plugs include blades for 50A configurations.
- Surface receptacles 0.75" (19.05mm) and 1.0" (25.4mm) concentric knockouts and adjustable cord clamp allow for wiring from bottom or back.
- Flush receptacles fit one or two gang enclosures.
- High strength glass reinforced nylon body resists breakage in high abuse areas for Catalog No. 5795N and 5709N.

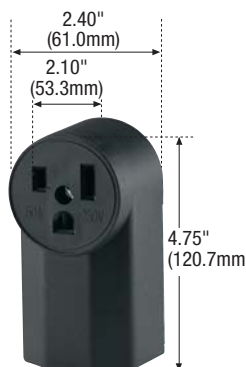

1252

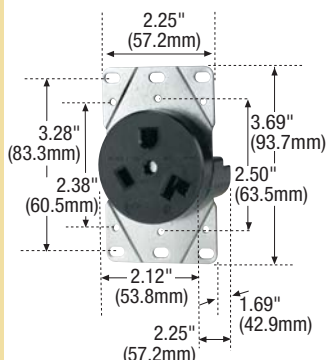

5795N



42

#### NEMA 6-50 Rating 50A 250V

##### Receptacles

| Description | Color | Catalog No. |
|-------------|-------|-------------|
| Surface     | Black | 1252        |
| Flush       | Black | 5709N       |
| Flush       | Brown | 1254*       |

\*Not NOM

##### Plugs

| Description             | Color | Catalog No. |
|-------------------------|-------|-------------|
| Angle Universal - Vinyl | Black | 42          |

#### NEMA 7-30 Rating 30A 277V

##### Receptacles

| Description | Color | Catalog No. |
|-------------|-------|-------------|
| Flush       | Black | 5795N       |



6-50R



6-50P



7-30R



7-30P

# Commercial Specification Grade Straight Blade Power Devices

3 Pole, 3 Wire Non-Grounding  
NEMA 10-20, 10-30  
20A 125/250V  
30A 125/250V



INDUSTRIAL  
COMMERCIAL  
RESIDENTIAL

**A-24**  
STRAIGHT BLADE  
RECEPTACLES

## TESTING & CODE COMPLIANCE

- UL file:  
Receptacles:  
(file no. E15058);  
Plugs:  
(file no. E15012).
- NOM Certified.

## MATERIAL CHARACTERISTICS

Temperature Rating:  
-20°C (without  
impact) to 75°C  
max. continuous.

## Power Devices

### FEATURES

- Heavy gauge steel mounting strap zinc-plated for corrosion resistance.
- Receptacles for use with copper or aluminum wire.
- Surface receptacles have patented lay-in terminals and accept up to #4 wire.
- Universal plugs include blades for 30A configurations.
- Surface receptacles 0.75" (19.05mm) and 1.0" (25.4mm) concentric knockouts and adjustable cord clamp allow for wiring from bottom or back.
- Flush receptacles fit one or two gang enclosures.

### NEMA 10-20 Rating 20A 125/250V

#### Receptacles

| Description | Color | Catalog No. |
|-------------|-------|-------------|
| Flush       | Brown | 805B*       |
|             | Ivory | 805V*       |

\*Not CSA approved

#### Plugs

| Description   | Color  | Catalog No. |
|---------------|--------|-------------|
| Armored Vinyl | Yellow | 2836        |


### NEMA 10-30 Rating 30A 125/250V

#### Receptacles


| Description | Color | Catalog No. |
|-------------|-------|-------------|
| Surface     | Black | 125         |
| Flush       | Brown | 38B         |

#### Plugs


| Description             | Color | Catalog No. |
|-------------------------|-------|-------------|
| Angle Universal - Vinyl | Black | 80          |

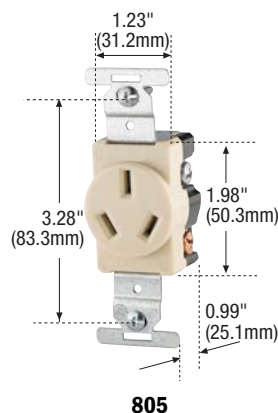

805



2836

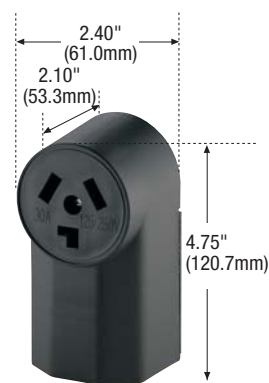

125



10-20R



10-20P



10-30R



10-30P



# Commercial Specification Grade Straight Blade Power Devices

3 Pole, 3 Wire Non-Grounding  
NEMA 10-50  
50A 125/250V


## Power Devices

### FEATURES


- Heavy gauge steel mounting strap zinc-plated for corrosion resistance.
- Receptacles for use with copper or aluminum wire.
- Surface receptacles have patented lay-in terminals and accept up to #4 wire.
- Universal plugs include blades for 50A configurations.
- Surface receptacles 0.75" (19.05mm) and 1" (25.4mm) concentric knockouts and adjustable cord clamp allow for wiring from bottom or back.
- Flush receptacles fit one or two gang enclosures.
- High strength glass reinforced nylon body resists breakage in high abuse areas for Catalog No. 7985N.

INDUSTRIAL  
COMMERCIAL  
RESIDENTIAL

## A-25 STRAIGHT BLADE RECEPTACLES



32B



122B



7985N

### NEMA 10-50 Rating 50A 125/250V

#### Receptacles

| Description      | Color | Catalog No. |
|------------------|-------|-------------|
| Surface          | Black | 112BK       |
| Flush            | Black | 7985N       |
| Flush            | Brown | 32B         |
| Flush Off Center | Brown | 122B        |

#### Plugs

| Description             | Color | Catalog No. |
|-------------------------|-------|-------------|
| Angle Universal - Vinyl | Black | 80          |

### TESTING & CODE COMPLIANCE

- UL file:
- Receptacles:  
(file no. E15058);
- Plugs:  
(file no. E15012).
- NOM Certified.

### MATERIAL CHARACTERISTICS

Temperature Rating:  
-20°C (without impact) to 75°C max.  
continuous. 7985N:  
V2 rated; -40°C  
(without impact)  
to 105°C max.  
continuous.



10-50R



10-50P



# Commercial Specification Grade Straight Blade Power Devices

3 Pole, 4 Wire Grounding  
NEMA 14-20,14-30,  
20A 125/25V,  
30A 125/250V



INDUSTRIAL  
COMMERCIAL  
RESIDENTIAL

## A-26 STRAIGHT BLADE RECEPTACLES

### TESTING & CODE COMPLIANCE

- UL file:  
Receptacles:  
(file no. E15058);  
21: UL and cUL,  
(file no. E15012).
- CSA (file no. 6914  
(6233-01))
- Meets all CSA  
requirements,  
C22.2 no. 42.
- NOM Certified,  
except as noted.


### MATERIAL CHARACTERISTICS

Temperature Rating:  
-20°C (without  
impact) to 75°C  
max. continuous.  
5744N:  
-40°C (without  
impact) to 105°C  
max. continuous.

## Power Devices

### FEATURES

- Heavy gauge steel mounting strap zinc-plated for corrosion resistance.
- Receptacles for use with copper or aluminum wire.
- Surface receptacles have patented lay-in terminals and accept up to #4 wire.
- Universal plugs include blades for 30A or 50A configurations.
- Surface receptacles 0.75" (19.05mm) and 1" (25.4mm) concentric knockouts and adjustable cord clamp allow for wiring from bottom or back.
- Flush receptacles fit one or two gang enclosures.
- High strength glass reinforced nylon body resists breakage in high abuse areas for Catalog No. 5744N.



1167



57



21

| NEMA 14-20 Rating 20A 125/250V           |       |             |
|------------------------------------------|-------|-------------|
| Receptacles                              |       |             |
| Description                              | Color | Catalog No. |
| Single, Bakelite,<br>Back and Side Wired | Black | 5759*       |
| *UL498 Listed (File No. E140596)         |       |             |
| NEMA 14-30 Rating 30A 125/250V           |       |             |
| Receptacles                              |       |             |
| Description                              | Color | Catalog No. |
| Surface                                  | Black | 1225        |
| On 4.6875" (119.06mm) Steel Cover        | Black | 1167        |
| Flush                                    | Black | 5744N       |
| Flush                                    | Black | 1257        |
| Panel Mount                              | Black | 57          |
| Plugs                                    |       |             |
| Description                              | Color | Catalog No. |
| Angle Universal – Plastic                | Black | 21          |



14-20R



14-20P



14-30R



14-30P



INDUSTRIAL  
COMMERCIAL  
RESIDENTIAL


## A-27 STRAIGHT BLADE RECEPTACLES

### TESTING & CODE COMPLIANCE

- UL file:  
Receptacles:  
(file no. E15058);  
21: UL and cUL,  
(file no. E15012).  
• CSA (file no. 6914  
(6233-01)).  
• Meets all CSA  
requirements,  
C22.2 no. 42.  
• NOM Certified,  
except as noted.

### MATERIAL CHARACTERISTICS

Temperature Rating:  
-20°C (without  
impact) to 75°C  
max. continuous.  
5754N, 8430N  
and 8450N:  
-40°C (without  
impact) to 105°C  
max. continuous.




## Commercial Specification Grade Straight Blade Power Devices

**3 Pole, 4 Wire Non-Grounding**  
**NEMA 14-50, 15-30, 15-50**  
**50A 125/250V**  
**30A 250/3Ø**  
**50A 250/3Ø**


### Power Devices

#### FEATURES


- Heavy gauge steel mounting strap zinc-plated for corrosion resistance.
- Receptacles for use with copper or aluminum wire.
- Surface receptacles have patented lay-in terminals and accept up to #4 wire.
- Universal plugs include blades for 30A or 50A configurations.
- Surface receptacles 0.75" (19.05mm) and 1" (25.4mm) concentric knockouts and adjustable cord clamp allow for wiring from bottom or back.
- Flush receptacles fit one or two gang enclosures.
- High strength glass reinforced nylon body resists breakage in high abuse areas for Catalog No. 5754N, 8430N and 8450N.



**1212**



**1258**

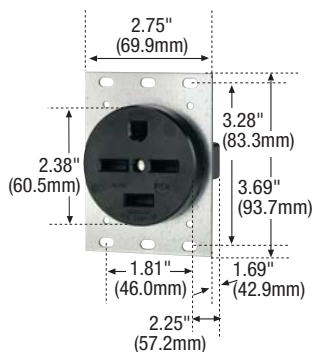

**8430N**

#### NEMA 14-50 Rating 50A 125/250V

##### Receptacles

| Description                       | Color | Catalog No. |
|-----------------------------------|-------|-------------|
| Surface                           | Black | 1212        |
| On 4.6875" (119.06mm) Steel Cover | Black | 1168        |
| Flush                             | Black | 5754N       |
| Flush                             | Black | 1258        |
| Panel Mount                       | Black | 58          |

##### Plugs

| Description               | Color | Catalog No. |
|---------------------------|-------|-------------|
| Angle Universal - Plastic | Black | 21          |

#### NEMA 15-30 Rating 30A 250V 3Ø

##### Receptacles

| Description | Color | Catalog No. |
|-------------|-------|-------------|
| Flush       | Black | 8430N       |

#### NEMA 15-50 Rating 50A 250V 3Ø

##### Receptacles

| Description | Color | Catalog No. |
|-------------|-------|-------------|
| Flush       | Black | 8450N       |



**14-50R**



**14-50P**



**15-30R**



**15-30P**



**15-50R**



**15-50P**

# Commercial Specification Grade Straight Blade Power Devices

3 Pole, 4 Wire Grounding  
NEMA 14-60, 15-60  
60A 125/250V  
60A 250V 3Ø



INDUSTRIAL  
COMMERCIAL  
RESIDENTIAL

## A-28 STRAIGHT BLADE RECEPTACLES

### TESTING & CODE COMPLIANCE

- UL file:  
Receptacles:  
(file no. E15058);  
20: UL and cUL,  
(file no. E15012).
- CSA (file no. 6914  
(6233-01)).
- Meets all CSA  
requirements,  
C22.2 no. 42.
- NOM Certified,  
except as noted.

### MATERIAL CHARACTERISTICS

Meets flammability  
requirements per  
UL 94, 8460N and  
9460N: V2 rated.  
Temperature Rating:  
-20°C (without  
impact) to 75°C  
max. continuous.  
8460N and 9460N:  
-40°C (without  
impact) to 105°C  
max. continuous.

## Power Devices

### FEATURES

- Heavy gauge steel mounting strap zinc-plated for corrosion resistance.
- Receptacles for use with copper or aluminum wire.
- Universal plugs include blades for 30A or 50A configurations.
- Flush receptacles fit one or two gang enclosures.
- High strength glass reinforced nylon body resist breakage in high abuse areas for Catalog No. 9460N and 8460N.

### NEMA 14-60 Rating 60A 125/250V

#### Receptacles

| Description                       | Color | Catalog No. |
|-----------------------------------|-------|-------------|
| Flush                             | Black | 9460N       |
| On 4.6875" (119.06mm) Steel Cover | Black | 1170        |
| Panel Mount                       | Black | 60          |



#### Plugs

| Description     | Color | Catalog No. |
|-----------------|-------|-------------|
| Angle - Plastic | Black | 20          |

### NEMA 15-60 Rating 60A 250V 3Ø

#### Power Receptacles

| Description    | Color | Catalog No. |
|----------------|-------|-------------|
| Flush Mounting | Black | 8460N       |

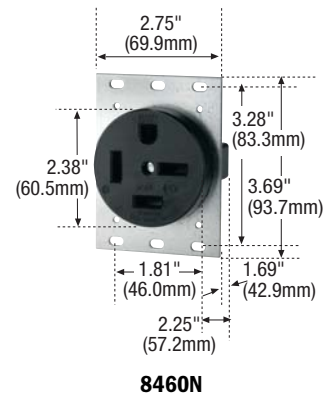

14-60R



14-60P




15-60R



15-60P






# Commercial Specification Grade Straight Blade Power Devices

4 Pole, 4 Wire Non-Grounding  
NEMA 18-60,  
60A 3ØY 120/208V  
Wallplate Guide

## Power Devices

### FEATURES

- Heavy gauge steel mounting strap zinc-plated for corrosion resistance.
- Receptacles for use with copper or aluminum wire.
- High strength glass reinforced nylon body resist breakage in high abuse areas for Cat. No. 5515N.



1169



19

INDUSTRIAL  
COMMERCIAL  
RESIDENTIAL

## A-29 STRAIGHT BLADE RECEPTACLES

### TESTING & CODE COMPLIANCE

- UL file:
- Receptacles:
- (file no. E15058;
- 19: UL and cUL,
- (file no. E15012)
- CSA (file no. 6914
- (6233-01)).
- Meets all CSA
- requirements,
- C22.2 no. 42,
- NOM Certified,
- except as noted,

### MATERIAL CHARACTERISTICS

Meets flammability requirements per UL 94, 5515N: V2 rated. Temperature Rating: -20°C (without impact) to 75°C max. continuous. 5515N: -40°C (without impact) to 105°C max. continuous.

### NEMA 18-60 Rating 60A 3ØY 120/208V

#### Receptacles

| Description                       | Color | Catalog No. |
|-----------------------------------|-------|-------------|
| Flush                             | Black | 5515N*      |
| On 4.6875" (119.06mm) Steel Cover | Black | 1169*       |
| Panel Mount                       | Black | 59          |

\*Not CSA or NOM

#### Plugs

| Description     | Color | Catalog No. |
|-----------------|-------|-------------|
| Angle - Plastic | Black | 19          |

### Wallplate Guide for Power Devices

| Power Device Catalog No.                                                            | Wallplate Catalog No.                    |
|-------------------------------------------------------------------------------------|------------------------------------------|
| 32, 38, 1233, 1234, 1253, 1254, 1257, 1258, 1263, 5700N, 5709N, 5716N, 5795N, 7985N | 39CH, 68, 2068, 2168, 5068, 93221, 93227 |
| 5515N, 5744N, 5754N, 8430N, 8450N, 8460N, 9460N                                     | 69, 5169, 93223                          |
| 122                                                                                 | 192                                      |



18-60R



18-60P